


# RY3118A

## ABRASION SPECIFICATIONS

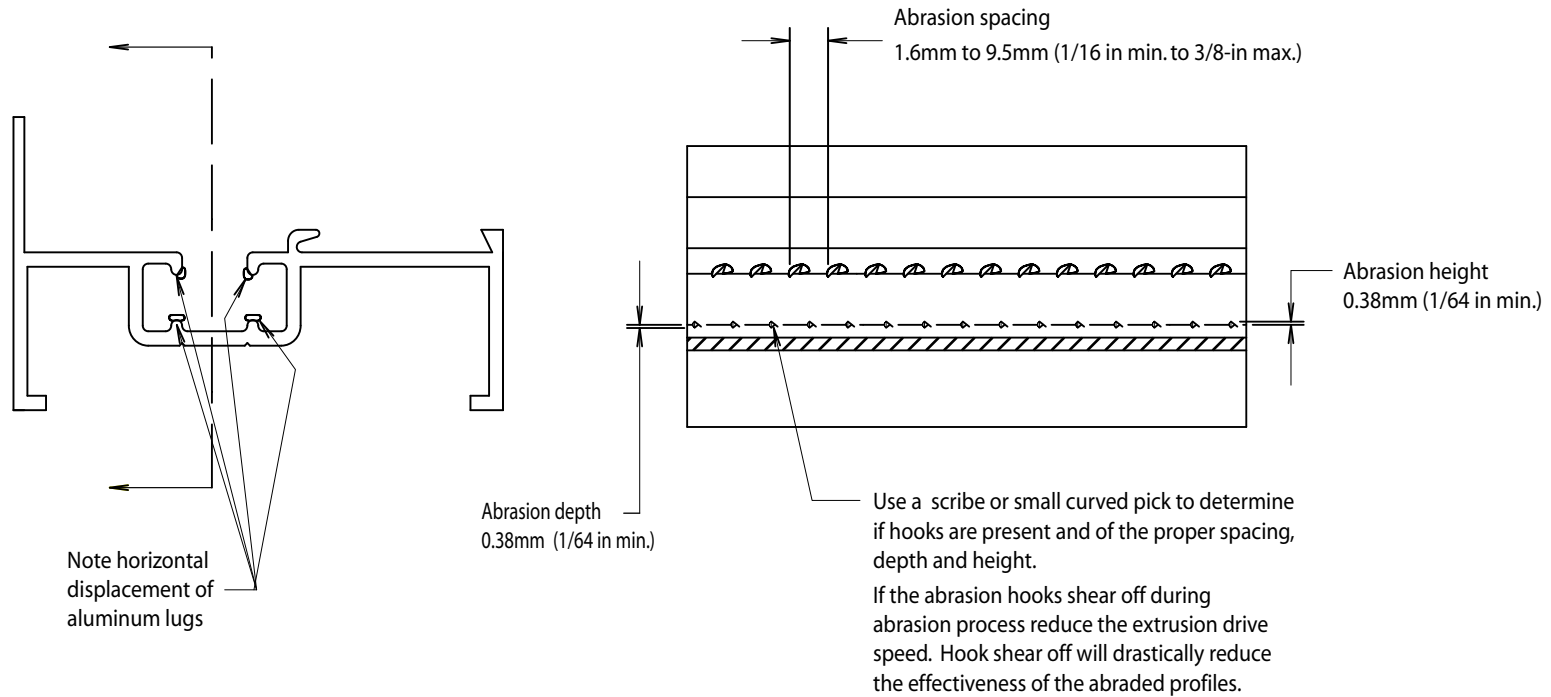

### NOTES:

Set drive speed and head speed appropriately to achieve the optimal abrasion depth, spacing and height.

Increasing the extrusion drive speed (meters per minute/ feet per minute) will increase the distance between the abrasions. decreasing the speed will decrease the distance.



**Azon**

2204 Ravine Road

Kalamazoo, MI 49004-3516

Tel: 269-385-5942 • Fax: 269-385-5937 | E-mail: azotec@azonusa.com • www.azonintl.com

**AZO/Tec**<sup>®</sup>

© Azon RY3118A 011513